

# Spec it Right:

### Volvo

**GENUINE PRODUCTS** 

#### 28SI™

- Output: 12 Volts 200 Amps 140 Amps at idle
- Dual Internal Fans: Provides maximum cooling
- Remote Sense: Drastically reduce battery charge time
- Warranty: 2 years/250,000 miles

#### 36SI™

- Output: 12 Volts 160/165 Amps 100 Amps at idle
- Highest output at low RPM: Manages heavy electrical loads at low RPM preventing premature battery discharge
- Remote Sense: Drastically reduce battery charge time
- Brushless durability: 13 fewer moving parts than a brush-type alternator, eliminating components that wear out while extending product life
- Warranty: 3 years/350,000 miles

#### 38SI™ & 40SI™

• Output:

38SI: 12 Volts 215 Amps - 121 Amps at idle

40SI: 12 Volts 240 Amps - 160 Amps at idle

40SI: 12 Volts 275 Amps - 180 Amps at idle

40SI: 12 Volts 300 Amps - 190 Amps at idle

40SI: 12 Volts 320 Amps - 190 Amps at idle

- **Highest output at low RPM:** Manages heavy electrical loads at idle preventing premature battery discharge
- Remote Sense: Drastically reduce battery charge time
- **Brushless durability:** 13 fewer moving parts than a brush-type alternator, eliminating components that wear out while extending product life
- Longer system life: Over spec'ing extends life of alternator
- Efficiency and power density: Highest combination in its class, providing substantial fuel savings
- Warranty: 3 years/350,000 miles



**28SI OPTION CODE** 

**PJXMRX** 



**36SI OPTION CODE** 

PJM3



#### **38SI OPTION CODE**

**PJXMRX** 

#### **40SI OPTION CODES**

240 Amp: PJM7\*

275 Amp: PJM9\*

300 Amp: PJXNAX

320 Amp: PJXQZZ

\* Special Quote



## Spec it Right:

### Volvo


#### 39MT™

- Over Crank Protection: A built-in circuit breaker, protects the starter from thermal damage, automatically resetting at a safe operating temperature
- Design refinements for optimal performance
- Improved starter pinion engagement: Redefined electrical soft start reduces wear-and-tear by slowly rotating the pinion until it properly engages into the ring gear before cranking.
- Warranty: 3 years/350,000 miles



#### **39MT OPTION CODES**

NCA5 Non-OCP Standard Position NCA7 (ISX)

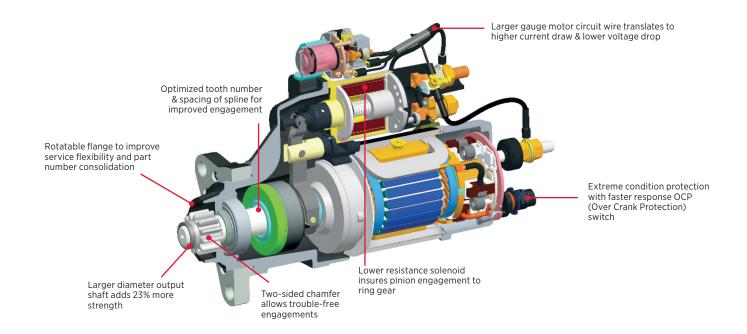

### delcoremy.com

